



Poor vent designs can allow snow infiltration under cap.

Hot attic melts snow that can lead to infiltration and ice dams along soffit.

Stale hot air reaches cooler area of roof condensing into moisture.

Soffit airflow blocked by insulation.

Trapped cool air in soffit.


Inadequate soffit vents that do not allow enough air to enter attic.

Improper airflow causes build up of stale hot air.

Melting snow turns to ice over cool soffit area.

Poor Ventilation

High airflow vents such as the PROventilator allow faster air movement through the attic. Attic air that does not move can cause home damage such as moisture and mold.



The cool soffit air replaces the warm air completing a continuous airflow cycle.

Proper Ventilation eliminates extreme temperature ranges, assuring life span of shingles.

Soffit airflow protected from insulation.

Proper Ventilation helps home interior maintain steady temperatures by stopping heat from radiating back into the home.

Cool air enters soffit.

Balanced Ventilation

The proper number of vents positioned along the ridge line of the roof to allow warm moist air to exhaust from within the attic space.

Moisture in the attic space can lead to mold build up. The key to mold control is moisture control. Water-damaged materials or wet surfaces serve as a breeding ground for biological pollutants such as molds, mildew and bacteria.

Health effects from biological pollutants such as mold include: irritation of eyes, skin and mucous membranes as well as various respiratory symptoms such as asthma.

Moisture problems in houses are detrimental to good health and to the durability and resale value of homes.

Why Choose WeatherPRO®?

Protect Against Snow/Rain Infiltration

Proper ventilation is required to prevent moisture problems in attics caused by ice-damming, rain and snow penetration. During periods of extreme weather poorly designed roof vents and unbalanced attic ventilation systems will promote the entry and build up of snow and rain in the attic space. Weather infiltration in the attic can lead to high levels of moisture causing damage to insulation and ceiling coverings.

Control Heat/Moisture/Mold

In the warmer summer months heat trapped in the attic builds up promoting the deterioration of shingles and warming the living space below. In the colder winter months poor ventilation allows heat from the home to build up in the attic space. Warm moist air in the attic will condense and can lead to rotting wood framing, wet insulation and sagging or stained ceilings.



Control the weather
WeatherPRO® Series



duraflo®
www.duraflo.com

E-mail: duraflo@canplas.com

canplas

DUR-WP-ENG-03-23 PRINTED IN CANADA

Canplas Industries Ltd.
500 Veterans Drive, P.O. Box 1800
Barrie, Ontario
Canada L4M 4V3
1-800-461-5300
Tel: (705) 726-3361
Fax: (705) 726-2186

duraflo®
WE KNOW VENTILATION

duraflo[®] PRO Ventilator



Extreme Weather Protection for the home
High Performance Airflow
"Easy Level" Adjustment System Reduces Installation Time

The PROVentilator combines the field tested benefits of the patented WeatherPRO internal baffle system with multi stage, high volume, airflow for superior attic ventilation.


- Pivoting top with locking pitch tabs
- For 3/12 to 12/12 roof pitches
- **55% lighter** than traditional tall vents
- 48 to 130 Sq. In. NFA models
- Crush, dent & corrosion resistant
- UV & Cold impact resistant to -40
- U.S. Patent 9,523,509



CATEGORY 2
HURRICANE RATED



Easy Level Base design

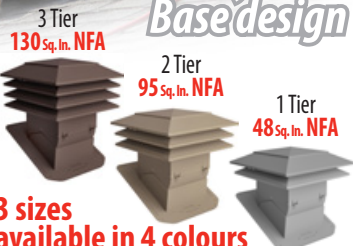

3 sizes available in 4 colours

3 Tier Model: 130 Sq. In. NFA
1000 - 1200 sq. ft.

DESCRIPTION	PART #	CTN. QTY.
Black	60PRO150BL	1
Brown	60PRO150BR	1
Grey	60PRO150G	1
Weatherwood	60PRO150WW	1

2 Tier Model: 95 Sq. In. NFA
400 - 500 sq. ft.

DESCRIPTION	PART #	CTN. QTY.
Black	60PRO140BL	1
Brown	60PRO140BR	1
Grey	60PRO140G	1
Weatherwood	60PRO140WW	1

1 Tier Model: 48 Sq. In. NFA
200 - 300 sq. ft.

DESCRIPTION	PART #	CTN. QTY.
Black	60PRO130BL	1
Brown	60PRO130BR	1
Grey	60PRO130G	1
Weatherwood	60PRO130WW	1


duraflo[®] WeatherPRO[®] Series

PRO75

75 Sq. In. NFA

PRO50

50 Sq. In. NFA

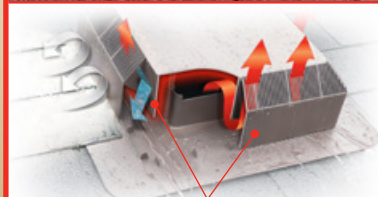

• Patent Pending baffle and Moisture Control System

PRO75:

DESCRIPTION	PART #	CTN. QTY.
Black	60PRO75BL	4
Brown	60PRO75BR	4
Grey	60PRO75G	4
Weatherwood	60PRO75WW	4



PRO50:

DESCRIPTION	PART #	CTN. QTY.
Black	60PRO50BL	9
Brown	60PRO50BR	9
Grey	60PRO50G	9
Weatherwood	60PRO50WW	9

CDN. Patent 2,313,601

TDI
Texas Department of Insurance

CATEGORY 2
HURRICANE RATED



duraflo[®]

PRO Slant Back

No Soffits? No Problem!

Use as an exhaust vent or use as an intake vent when soffit ventilation is prohibited. No need to worry about extreme weather or insufficient soffit ventilation!

- Suitable for roof pitches from 3/12 to 14/12
- Cold impact resistant down to -40°
- UV resistant polypropylene
- US Patent 9,243,813
- US Patent 9,557,074 B2

DESCRIPTION	PART #	CTN. QTY.
Black	60PRO50SLBL	8
Brown	60PRO50SLBR	8
Grey	60PRO50SLG	8
Weatherwood	60PRO50SLWW	8

CATEGORY 2
HURRICANE RATED



The Intake & Exhaust multi vent

Intake

Exhaust

duraflo[®] PRO Ridge



- Net Free Area: 18.3 sq.in./lin.ft.
- With UV inhibitors
- Molded nail supports
- Code regulated insect grill
- Manufactured in both U.S. & metric sizes
- TriFold flexibility for ease of use on full range of pitches

PRORidge SOLID

- Black with UV inhibitors
- 3 tab & metric




TDI
Texas Department of Insurance

Latch Connectors to assure secure placement

DESCRIPTION	PART #	CTN. QTY.
Black	6094BL	12


PRORidge

- Black, Brown & Weatherwood with UV inhibitors, Manufactured in both U.S. & metric sizes



DESCRIPTION	PART #	CTN. QTY.
Metric - Black	6072METBL	12
Metric - Brown	6072METBR	12
Metric - Weatherwood	6072METWW	12
Imperial - Black	6073BL	12

duraflo[®] PRO Turbo



Patented internal baffles deflect water and snow, allowing it to drain harmlessly out the drainage openings.

Eliminates traditional turbine "squeaking"

- 117 sq. in. net free area
- UV resistant polypropylene
- Turbo Cap resists crushing, denting and peeling
- Extreme cold & heat resistant
- Adjustable base
- CDN. Patents 2,536,023 & 2,803,775
- U.S. Patent 7,774,023

duraflo[®] Universal Turbine Ball Replacement

Fits 12" & 14" bases

Replaces traditional "squeaking" turbines easily without removing existing vent base or shingles.



DESCRIPTION	PART #	CTN. QTY.
Black	6001BL	1
Brown	6001BR	1
Grey	6001G	1
Weatherwood	6001WW	1



Easy Level Base design

• Superior Air Flow • No Maintenance

DESCRIPTION	PART #	CTN. QTY.
Black	60PRO117BL	1
Brown	60PRO117BR	1
Grey	60PRO117G	1
Weatherwood	60PRO117WW	1

TDI
Texas Department of Insurance

CATEGORY 2
HURRICANE RATED



www.duraflo.com

1-800-461-5300

duraflo[®]
WE KNOW VENTILATION