



31 Patterson Rd, PO Box 1800, Barrie, ON,
CANADA, L4M 4V3

T: +1(705) 726 3361

F: +1(705) 726 2186

www.enduragreasemanagement.com

tech-support@endurainterceptor.com

Product Name

Endura XL
Solids Interceptor

Product Details

Material: Polyethylene


Total Mass: 283 lb (128 kg)

Liquid Capacity:

257 gal (973 L)

Connection type:

4"- Mechanical Joint

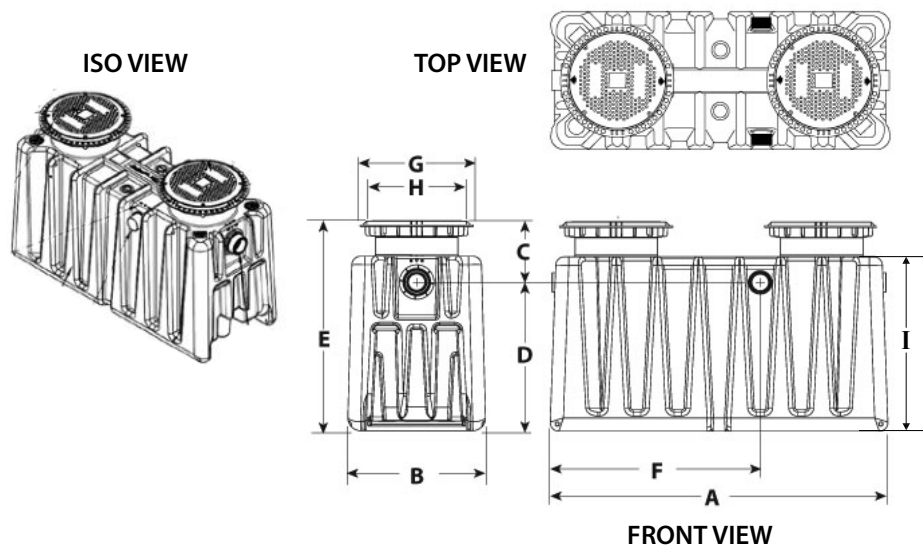

Part Number	Product Code	Product Type
40100E04	766164	4" -"S" RATED (TRAFFIC)
USA 4075A04T	766015	4" THREADED
4075A04M	766080	4" -"M" RATED (PEDESTRIAN /LIGHT TRAFFIC COVERS)
USA 4075A04MT	766081	4" THREADED
USA 4075A04C	766138	4" HUB
40100AX35	766016	35" ENDURA XL EXTENSION RISER
40100AX18	766071	18" ENDURA XL EXTENSION RISER
4010055RK	766174	ENDURA XL SAFETY STRAP KIT

Tank Specifications				Dimensions in inches								
Efficiency	Flow Rate (gpm)	Grease Cap. (lb)	Conn. Size	A	B	C	D	E	F	G	H	I
98%	≤100	1058	4"	78	32	13	34.5	47.5	48.5	26	22	40.5

MANUFACTURER DIMENSIONS ARE SUBJECT TO TOLERANCE AND CHANGE WITHOUT NOTICE. WE ASSUME NO RESPONSIBILITY OR LIABILITY

ENDURA XL SOLIDS INTERCEPTORS

MATERIAL

- The body, lid and internal components shall be made of corrosion resistant thermoplastics that can withstand operational temperatures up to 160 degree F.
- The interceptor body shall be constructed of high density polyethylene

CONNECTIONS

- Shall be hub mechanical joint PP end connectors

DESIGN FEATURES

- Lids shall be Special duty traffic rated Type 'S' to support 10,000lbs
- Internal features shall be removable or allow access for easy cleaning
- Risers shall allow for below grade installations of interceptors to be extended to grade, up to a maximum of 72"

CAPACITY

- All interceptors shall be marked with manufacturer's capacity rating

MARKINGS

- All interceptors shall be marked with the manufacturers name or trademark, model number, rated flow(s), "inlet" and "outlet", nominal inlet size